


Hunter Douglas EOS 500 – Total Blackout Roller Blinds

Chain Control – Operation Checklist

Opening of the Blinds

- Ensure nothing is leaning on or impeding the blind/fabric.
- Ensure the blind fabric is held within the side channels.
- Use the correct chain side for opening the blind. I.E Closest to operator.
- Use a slow smooth action for lifting the blind.
- Stop lifting the blind when the bottom bar is at the headbox. The bottom bar should not enter the headbox.

IMPORTANT: Do not pull the chain too far as the bottom bar will get stuck in the headbox.

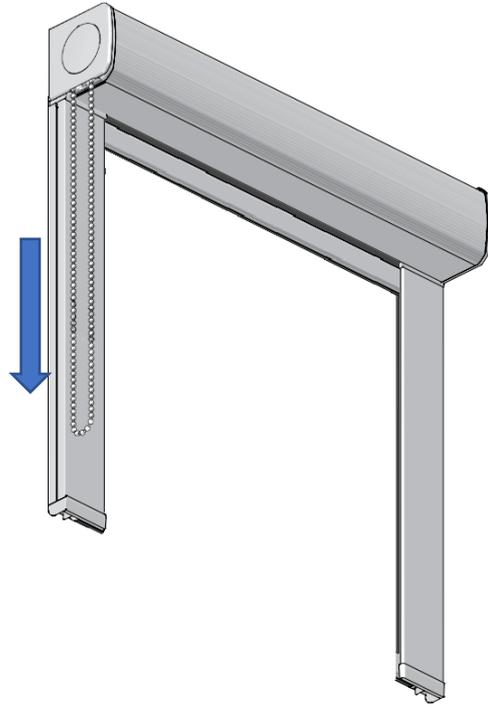

Closing of the Blinds

- Ensure nothing can impede the blind as it is coming down.
- Ensure the blind fabric is held within the side channels.
- Use the correct chain side for Closing the blind. I.E Farthest from operator.
- Use a slow smooth action for closing the blind.
- Stop closing the blind when the bottom bar is at the window sill. The fabric should remain taught within the side channels.

IMPORTANT: Do not pull the chain too far as the fabric will continue rolling from headbox and will result in the fabric coming out of the side channels.

